



ZhangZhou Orsenar Electronics Co., Ltd
Email: Info@orsenar.com
Mob: 0086-15159669216(Wechat/Whatsapp)
Add: WanFu Industry Zone, ShiTing Street,
XiangCheng District, ZhangZhou City FuJian Province.




ABOUT US

Orseer is an international and comprehensive company established in 2010, which specializing in the integration of sliding gate opener, swing gate opener and smart control system, electronic intelligent products R&D, production, sales and brand operation.

We can provide highly customized solutions including both hardware and software, as well as launched products like sliding gate motors, swing gate motors, garage door motors and Wifi/Bluetooth door controllers for various door motors.

Our quality control team executes stringent exam procedures on every detail from income materials to products output. Our development department makes continuous efforts on developing new products, upgrading existing prouducts and working out solutions for certain custom projects. We also have professional posonnels to offer technical supports and deal with maintenance requests.

PRODUCT CATALOG

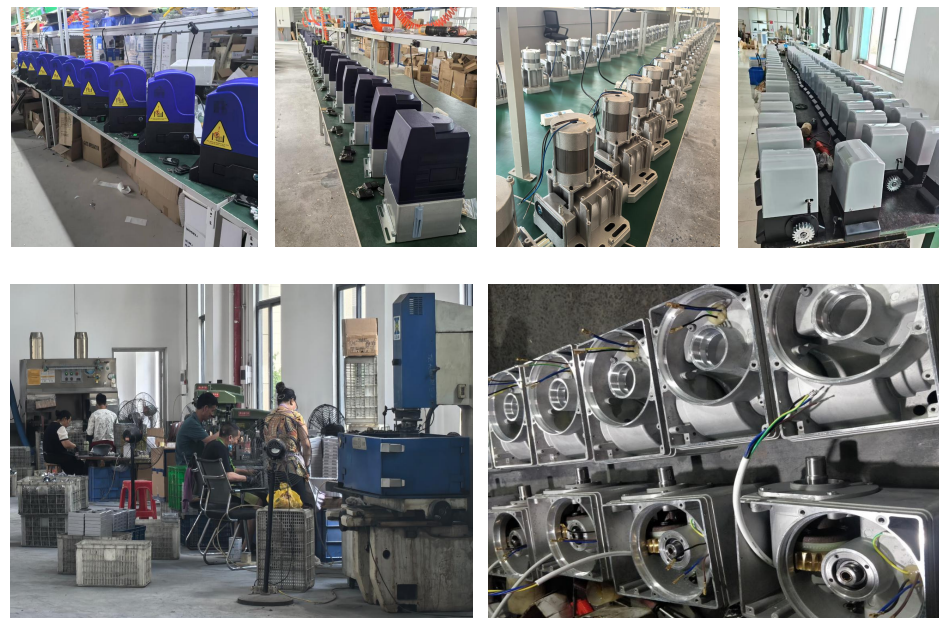

AC SLIDING GATE
OPERATOR

03



DC SLIDING GATE
OPERATOR

09



ARM SWING GATE
OPERATOR

12



WHEEL SWING
GATE OPERATOR

17



SIDE MOUNTED
SWING DOOR
OPERATOR

19



PARKING
BARRIER GATE

23



SMART
CONTROLLER

26



ACCESSORIES

29



AC SLIDING GATE OPERATOR

- 1 ACS01 300-800KG Sliding Gate Operator
- 2 AC300-AC2000 300-2000KG Sliding Gate Operator
- 3 ACSL200 2000KG Oil Immersed Sliding Gate Operator
- 4 ACPM1000 AC Permanent Magnet Sliding Gate Operator
- 5 ACSL3000-ACSL6000 AC Industry Sliding Gate Operator

MODEL: ACS01

192(W) x 220(L) x 265(H) mm



AC SLIDING GATE OPERATOR

FUNCTIONS AND ADVANTAGES

1. Overheating protection: When the temperature reaches the rated value, it will automatically cut off the power to prevent the motor from burning.
2. Easy to install: The clutch can be opened and the door can be opened and closed manually when the power is cut off.
3. Standard with soft start and soft stop, resistance rebound, auto close, one button reverse and other functions.
4. Multiple Interfaces: Infrared sensor, warning light, wall switch etc.
5. Regular Packing Components: motor x 1, remotes x 2, key x 2, manual x 1, installation accessories.
6. Optional accessories: warning light, photocell, wifi controller, wifi camera, gear racks, wall switch, RF keypads etc.

MODEL:	ACS01-300	ACS01-600	ACS01-800	ACS01-1000
Power Rate:	150W	280W	370W	550W
Torque:	14N.m	18N.m	22N.m	27N.m
Max Gate Weight:	300KG	600KG	800KG	1000KG
Power Supply:	AC220V/110V 50/60Hz			
Motor Speed:	1400r/min			
Gate Speed:	12m/min			
Limit Switch:	Magnetic Limit Switch			
Noise:	≤56dB			
Working Temperature:	-40°C ~ +60°C			

MODEL:
AC300-AC2000

202(W) x 275(L) x 311(H) mm



AC SLIDING GATE OPERATOR

FUNCTIONS AND ADVANTAGES

1. Overheating protection: When the temperature reaches the rated value, it will automatically cut off the power to prevent the motor from burning.
2. Easy to install: The clutch can be opened and the door can be opened and closed manually when the power is cut off.
3. Standard with soft start and soft stop, resistance rebound, auto close, one button reverse and other functions.
4. Multiple Interfaces: Infrared sensor, warning light, wall switch etc.
5. Regular Packing Components: motor x 1, remotes x 2, key x 2, manual x 1, installation accessories.
6. Optional accessories: warning light, photocell, wifi controller, wifi camera, gear racks, wall switch, RF keypads etc.

MODEL:	AC300	AC600	AC800	AC1200	AC1500	AC2000
Power Rate:	150W	280W	370W	550W	750W	1200W
Torque:	14N.m	18N.m	22N.m	27N.m	35N.m	45N.m
Max Gate Weight:	300KG	600KG	800KG	1200KG	1500KG	2000KG
Power Supply:	AC220V/110V 50/60Hz					
Motor Speed:	1400r/min					
Gate Speed:	12m/min					
Limit Switch:	Magnetic/Spring Limit Switch					
Noise:	≤56dB					
Working Temperature:	-40°C ~ +60°C					

MODEL: ACSL200

202(W) x 257(L) x 323(H) mm



AC OIL IMMERSED SLIDING GATE OPERATOR

FUNCTIONS AND ADVANTAGES

1. Oil immersed gear and motor ensures long life.
2. Overheating protection: When the temperature reaches the rated value, it will automatically cut off the power to prevent the motor from burning.
3. Easy to install: The clutch can be opened and the door can be opened and closed manually when the power is cut off.
4. Standard with soft start and soft stop, resistance rebound, auto close, one button reverse and other functions.
5. Multiple Interfaces: Infrared sensor, warning light, wall switch etc.
6. Regular Packing Components: motor x 1, remotes x 2, key x 2, manual x 1, installation accessories.
7. Optional accessories: warning light, photocell, wifi controller, wifi camera, gear racks, wall switch, RF keypads etc.

MODEL: SL200

Power Rate: 550W

Torque: 38N.m

Max Gate Weight: 2000KG

Power Supply: AC220V/110V 50/60Hz


Motor Speed: 1400r/min

Gate Speed: 12m/min

Limit Switch: Magnetic/Spring Limit Switch

Noise: ≤56dB

Working Temperature: -40°C ~ +60°C



1. Oil-immersed motors can increase motor operating time and can be used in scenarios with frequent door opening and closing, making them suitable for public places such as parking lots, apartments, and schools.
2. The internal worm gear is made of copper by default, which can increase its service life. In addition, the internal oil can lubricate the worm gear, reduce friction, and greatly extend its service life.

MODEL:
ACPM1000

200(W) x 260(L) x 290(H) mm



AC PERMANENT MAGNET SLIDING GATE OPERATOR

FUNCTIONS AND ADVANTAGES

1. Speed adjustable: 8-18m/min gate speed adjustable.
2. High efficiency / high frequency use without thermal protection,
3. Over phase / current protection
4. Strong overload capacity.
5. Easy to install: The clutch can be opened and the door can be opened and closed manually when the power is cut off.
6. Standard with soft start and soft stop, resistance rebound, auto close, one button reverse and other functions.
7. Multiple Interfaces: Infrared sensor, warning light, wall switch etc.
8. Regular Packing Components: motor x 1, remotes x 2, key x 2, manual x 1, installation accessories.
9. Optional accessories: warning light, photocell, wifi controller, wifi camera, gear racks, wall switch, RF keypads etc.

MODEL:	ACPM1000	ACPM1800	ACPM2800
Max Gate Weight:	1000KG	1800KG	2800KG
Power Supply:	AC220V/110V 50/60Hz		
Gate Speed:	8-18m/min speed adjustable		
Limit Switch:	Magnetic/Spring Limit Switch		
Noise:	≤56dB		
Working Temperature:	-40°C ~ +60°C		

MODEL:
ACSL3000-SL6000

258(W) x 309(L) x 496(H) mm



AC Industry Sliding Gate Operator

FUNCTIONS AND ADVANTAGES

1. Turbo worm transmission mechanism, transmission stability.
2. Gear with end cover protection, more secure and reliable.
3. It could work continuously for 3-4 hours
4. Easy to install: The clutch can be opened and the door can be opened and closed manually when the power is cut off.
5. Build in inverter for motor
6. Regular Packing Components: motor x 1, remotes x 2, key x 2, manual x 1, installation accessories.

MODEL:	ACSL3000	ACSL4000	ACSL6000
Power Rate:	1300W	1500W	2200W
Torque:	170N.m	220N.m	280N.m
Max Gate Weight:	3000KG	4000KG	6000KG
Power Supply:	AC220V/110V 50/60Hz	3 Phase AC380V 50/60Hz	
Motor Speed:	1400r/min		
Gate Speed:	12m/min		
Limit Switch:	Spring Limit Switch		
Noise:	≤56dB		
Working Temperature:	-40°C ~ +60°C		



DC SLIDING GATE OPERATOR

- 1 BG900 DC Sliding Gate Operator
- 2 BG1000-BG2500 DC Sliding Gate Operator

MODEL: BG900

182(W) x 169(L) x 285(H) mm



DC SLIDING GATE OPERATOR

FUNCTIONS AND ADVANTAGES

1. Support built-in 2.9AH lead-acid battery, can continue to use in case of power failure.
2. Support AC220V power supply, and DC24V battery, which can be automatically charged when connected to 220V power supply.
3. Easy to install: The clutch can be opened and the door can be opened and closed manually when the power is cut off.
4. Standard with soft start and soft stop, resistance rebound, auto close, one button reverse and other functions.
5. Multiple Interfaces: Infrared sensor, warning light, wall switch etc.
6. Regular Packing Components: motor x 1, remotes x 2, key x 2, manual x 1, installation accessories.
7. Optional accessories: backup battery, warning light, photocell, wifi controller, wifi camera, gear racks, wall switch, RF keypads etc.

MODEL:	BG900-12M	BG900-15M
Power Rate:	110W	130W
Gate Speed:	12m/min	15m/min
Motor Speed:	1500r/min	2000r/min
Torque:	23N.m	
Max Gate Weight:	900kg	
Power Supply:	AC220V/110V 50/60Hz	
Limit Switch:	Magnetic Limit Switch	
Noise:	≤56dB	
Working Temperature:	-40°C ~ +60°C	

MODEL:
BG1000-BG2500

190(W) x 318(L) x 301(H) mm



DC SLIDING GATE OPERATOR

FUNCTIONS AND ADVANTAGES

1. All models supports DC24V lead acid backup battery, BG1000 and BGH1200 support built-in li-ion battery, can continue to use in case of power failure and automatically charge when connected to 220V power supply or solar panel.
2. Easy to install: The clutch can be opened and the door can be opened and closed manually when the power is cut off.
3. Standard with soft start and soft stop, resistance rebound, auto close, one button reverse and other functions.
4. Multiple Interfaces: Infrared sensor, warning light, wall switch etc.
5. Regular Packing Components: motor x 1, remotes x 2, key x 2, manual x 1, installation accessories.
6. Optional accessories: backup battery, warning light, photocell, wifi controller, wifi camera, gear racks, wall switch, RF keypads etc.

MODEL:	BG1000	BG1500	BG2000	BG2500	BGH1200-18M	BGH1200-24M
Power Rate:	130W	180W	280W	350W	250W	300W
Torque:	25N.m	35N.m	45N.m	50N.m	27N.m	27N.m
Max Gate Weight:	1000KG	1500KG	2000KG	2500KG	1200KG	1200KG
Gate Speed:	12m/min				18m/min	24m/min
Power Supply:	DC24V AC220V/110V 50/60Hz					
Limit Switch:	Magnetic/Spring Limit Switch					
Noise:	≤50dB					
Working Temperature:	-40°C ~ +60°C					



ARM SWING GATE OPERATOR

- 1 ASM12/ASM13 Arm Swing Gate Operator
- 2 AS230K Arm Swing Gate Operator
- 3 AS330K Arm Swing Gate Operator

MODEL:
ASM12/ASM13



ASM12

ASM13

ARM SWING GATE OPERATOR

FUNCTIONS AND ADVANTAGES

1. Strong power, stable operation.
2. Easy installation and adjustment, safe and reliable.
3. External controller box, single/double gate control selectable.
4. Multiple Interfaces: Infrared sensor, warning light, wall switch etc.
5. Regular Packing Components: motor x 2, control box x 1, remotes x 2, key x 2, manual x 1, installation accessories.
6. Optional accessories: warning light, photocell, wifi controller, wifi camera, wall switch, RF keypads etc.

MODEL:	ASM12	ASM13
Power Rate:	40W x 2	60W x 2
Max Gate Weight:	220KG/leaf	300KG/leaf
Max Gate Width:	2.5 meter/leaf	
Motor Speed:	290r/min	
Noise:	≤56dB	
Working Temperature:	-40°C ~ +60°C	

MODEL:
AS230K



ARM SWING GATE OPERATOR

FUNCTIONS AND ADVANTAGES

1. Stable power is its biggest feature.
2. Large swing gate opener motor, powerful, full function, no need to do regular maintenance, very stable and reliable operation.
3. Drived by thread pole.
4. Auto-shuttering back the door against touching, Soft start and soft stop.
5. Can chose one or two gates to open or close.
6. In the event of a power failure, the clutch can be released and manually opened.
7. Regular Packing Components: motor x 2, control box x 1, remotes x 2, key x 2, manual x 1, installation accessories.
8. Optional accessories: backup battery, warning light, photocell, wifi controller, wifi camera, wall switch, RF keypads etc.

MODEL: AS230K

Power Rate: 100W x 2

Max Gate Weight: 400KG/leaf

Motor Speed: 2600r/min

Output Torque: 2500N.m

Input Voltage: DC24V

Opening Time: 18s

Max Gate Width: 3 meter/leaf

Noise: ≤56dB

Working Temperature: -40°C ~ +60°C



Inside Copper worm gear can increase the lifespan of the motor.

ORSEAR

MODEL:
AS230K



ARM SWING GATE OPERATOR

FUNCTIONS AND ADVANTAGES

1. Stable power is its biggest feature.
2. Large swing gate opener motor, powerful, full function, no need to do regular maintenance, very stable and reliable operation.
3. Drived by thread pole.
4. Auto-shuttering back the door against touching, Soft start and soft stop.
5. Can chose one or two gates to open or close.
6. In the event of a power failure, the clutch can be released and manually opened.
7. Regular Packing Components: motor x 2, control box x 1, remotes x 2, key x 2, manual x 1, installation accessories.
8. Optional accessories: backup battery, warning light, photocell, wifi controller, wifi camera, wall switch, RF keypads etc.

MODEL: AS330K

Power Rate: 100W x 2

Max Gate Weight: 500KG/leaf

Motor Speed: 2600r/min

Output Torque: 2500N.m

Input Voltage: DC24V

Opening Time: 18s

Max Gate Width: 4 meter/leaf

Noise: ≤56dB

Working Temperature: -40°C ~ +60°C



Inside Copper worm gear can increase the lifespan of the motor.

ORSEAR

MODEL:
AS770K



ARM SWING GATE OPERATOR

FUNCTIONS AND ADVANTAGES

1. High mechanical efficiency, stable performance.
2. Precise limit, safe and reliable.
3. Can chose one or two gates to open or close.
4. In the event of a power failure, the clutch can be released and manually opened.
5. Can chose one or two gates to open or close.
6. Regular Packing Components: motor x 2, control box x 1, remotes x 2, key x 2, manual x 1, installation accessories.
7. Optional accessories: backup battery, warning light, photocell, wifi controller, wifi camera, wall switch, RF keypads etc.

MODEL: AS770K

Power Rate: 110W x 2

Max Gate Weight: 500KG/leaf

Motor Speed: 3500r/min

Output Torque: 400N.m

Input Voltage: DC24V

Opening Time: 16s

Max Gate Width: 2.5 meter/leaf

Noise: ≤56dB

Working Temperature: -40°C ~ +65°C



WHEEL SWING GATE OPERATOR

1 RSM03 Wheel Swing Gate Operator

MODEL:
RSM03




WHEEL SWING GATE OPERATOR

FUNCTIONS AND ADVANTAGES

- 1. Turbo worm transmission mechanism, transmission stability.
- 2. Mechanical limit,easy installation and adjustment, safe and reliable.
- 3. External control box, single, double gate control selectable.
- 4. Easy to install, the clutch can be opened and the door can be opened and closed manuallywhen the power is cut off.
- 5. Multiple interfaces (DC24VBackup battery,infrared sensor, alarm light, wifi module, phone visualsystem, external buttons etc.)
- 6. Regular Packing Components: motor x 2, control box x 1, remotes x 2, key x 2, manual x 1, installation accessories.
- 7. Optional accessories: backup battery, warning light, photocell, wifi controller, wifi camera, wall switch, RF keypads etc.

MODEL: RSM03	Input Voltage: DC24V
Power Rate: 80W	Gate Speed: 10-15 meter/min
Max Gate Weight: 600KG/leaf	Max Gate Width: 6 meter/leaf
Tolerance To Ground Unevenness: 0-80mm	Noise: ≤56dB
Pushing force for opening: 600N	Working Temperature: -40°C ~ +60°C

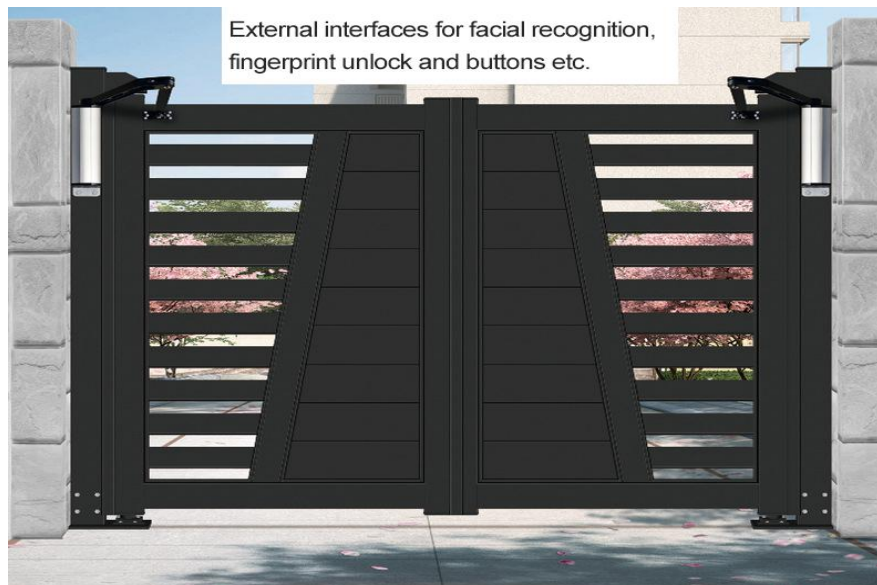

SIDE MOUNTED SWING DOOR OPERATOR

- 1 OS-Q7 Side Mounted Swing Door Operator
- 2 OS-080 Side Mounted Swing Door Operator
- 3 OS-081 Side Mounted Swing Door Operator

MODEL: OS-Q7



SIDE MOUNTED SWING DOOR OPERATOR

FUNCTIONS AND ADVANTAGES

1. It uses a 24V DC brushless motor, which is durable.
2. Waterproof, suitable for outdoor installation.
3. If the door encounters an obstacle or a person while it is closing, the door can immediately reverse to prevent people from being trapped, allowing people to enter and exit smoothly.
4. Multiple Interfaces: Infrared sensor, keypad, wall switch etc.
5. Regular Packing Components: motor x 1, remotes x 2, manual x 1, installation accessories.
6. Optional accessories: photocell, wifi controller, wifi camera, wall switch, RF keypads, Facial recognition devices, fingerprint unlocking devices etc.

MODEL: OS-Q7

Power Rate: 60W

Torque: 90N.m

Working Current: 7.5A

Motor Type: DC24V Brushless motor

Max Gate Weight: 150KG

Max Gate Width: 1.5 meter

Power Supply: AC220V/110V 50/60Hz

MODEL: OS-080



SIDE MOUNTED SWING DOOR OPERATOR

FUNCTIONS AND ADVANTAGES

1. It uses a 24V DC brushless motor, which is durable.
2. Waterproof, suitable for outdoor installation.
3. If the door encounters an obstacle or a person while it is closing, the door can immediately reverse to prevent people from being trapped, allowing people to enter and exit smoothly.
4. Multiple Interfaces: Infrared sensor, keypad, wall switch etc.
5. Regular Packing Components: motor x 1, remotes x 2, manual x 1, installation accessories.
6. Optional accessories: photocell, wifi controller, wifi camera, wall switch, RF keypads, Facial recognition devices, fingerprint unlocking devices etc.

MODEL: OS-080

Power Rate: 60W

Torque: 90N.m

Working Current: 7.5A

Motor Type: DC24V Brushless motor

Max Gate Weight: 250KG

Max Gate Width: 2 meter

Power Supply: AC220V/110V 50/60Hz

MODEL: OS-081



SIDE MOUNTED SWING DOOR OPERATOR

FUNCTIONS AND ADVANTAGES

1. It uses a 24V DC brushless motor, which is durable.
2. This model is for indoor use.
3. If the door encounters an obstacle or a person while it is closing, the door can immediately reverse to prevent people from being trapped, allowing people to enter and exit smoothly.
4. Multiple Interfaces: Infrared sensor, keypad, wall switch etc.
5. Regular Packing Components: motor x 1, remotes x 2, manual x 1, installation accessories.
6. Optional accessories: photocell, wifi controller, wifi camera, wall switch, RF keypads, Facial recognition devices, fingerprint unlocking devices etc.

MODEL:	OS-081A	OS-081
Power Rate:	30W	60W
Max Gate Weight:	100KG	150KG
Max Gate Width:	1.2 meter	1.5 meter
Working Current:	6.5A	7.5A
Motor Type:	DC24V Brushless Motor	
Working Temperature:	-40°C ~ +60°C	
Power Supply:	AC220V/110V 50/60Hz	



PARKING BARRIER GATE

1 PBG02 AC Barrier Gate

2 PBG03D DC Barrier Gate



PARKING BARRIER GATE

FUNCTIONS AND ADVANTAGES

1. Built-in copper core motor, continuous operation without downtime.
2. Install easily, barrier can be opened and closed manually after release the clutch in the case of a power failure.
3. Standard with automatic closing and other functions.
4. Multiple interfaces (infrared, alarm lamp, ground sensor, RFID reader, automatic vehicle identification system, mobile phone visual system, external buttons etc.).
5. Regular Packing Components: barrier gate x 1, remotes x 2, 6 meter straight arm, manual x 1, installation accessories.
6. Optional accessories: photocell, wifi controller, wifi camera, wall switch, RF keypads, automatic vehicle identification system etc.

MODEL: PBG02

Power Rate: 180W

Limit Switch: Photoelectric

Working Temperature: -40°C ~ +60°C

Motor Speed: 1400r/min

Time for up/down: 6s (style ① 6m, style ② 4m)

Noise: ≤56dB

Power Supply: AC220V/110V 50/60Hz

MODEL: PBG03D



PARKING BARRIER GATE

FUNCTIONS AND ADVANTAGES

1. Built-in copper core DC servo motor, continuous operation without downtime.
2. Install easily, barrier can be opened and closed manually after release the clutch in the case of a power failure.
3. Standard with automatic closing and other functions.
4. Switching gate time adjustable.
5. Multiple interfaces(infrared,alam lamp, ground sensor, RFID reader, automatic vehicle identification sytem, mobile phone visuval system, extemal buttons etc.,
6. Regular Packing Components: barrier gate x 1, remotes x 2, 6 meter straight arm, manual x 1, installation accessories.
7. Optional accessories: photocell, wifi controller, wifi camera, wall switch, RF keypads, automatic vehicle identification sytem etc.

MODEL: PBG03D

Power Rate: ≤200W

Limit Switch: Encoder


Working Temperature:-40°C ~ +80°C

Motor Speed: 3000r/min

Time for up/down: 0.6-8s adjustable

Noise: ≤50dB

Power Supply: DC24V AC220V/110V 50/60Hz

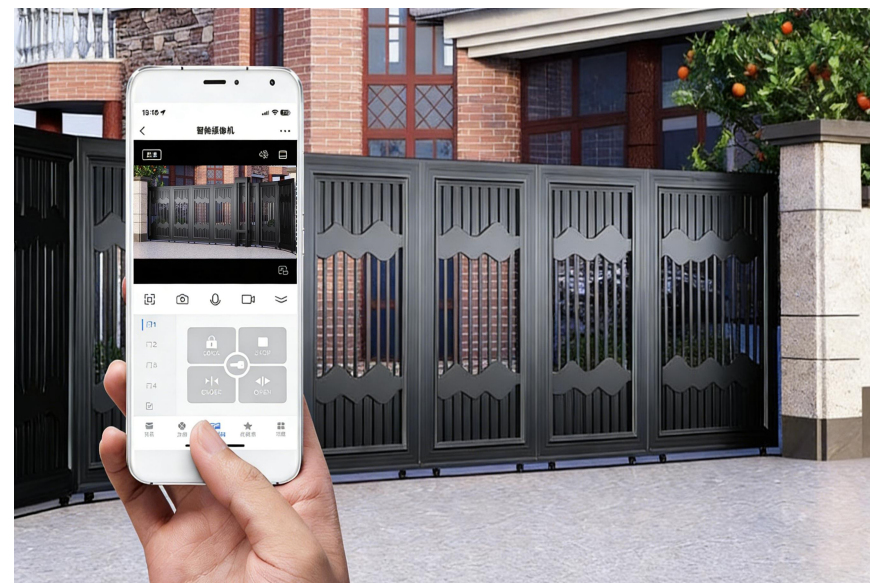

SMART CONTROLLER

1 OSC01 Tuya Wifi Controller 

2 OSC200 Tuya Wifi Camera 

ORSEAR



MODEL: OSC01



TUYA WIFI CONTROLLER

FUNCTIONS AND ADVANTAGES

1. The controller supports both WIFI and Bluetooth. When the WIFI router or the smart phone lost connection with the Internet, the controller can switch to Bluetooth connection automatically so you can keep using your smart phone to open and close your gate.
2. Copy coding controller, it match with motor by RF wireless through copy the remote code.
3. Regular Packing Components: WIFI controller x 1, power cable x 1, manual x 1, installation accessories.

MODEL: OSC01

Code: Copy Code

RF Transmit Range: 30-50 meter

Size: 90x90x20.4mm

Power Supply: AC100-240V

Connection: WIFI/Bluetooth

RF Frequency: 433.92MHz

Power Consumption: lower than 1W

App Support: Tuya and SmartLife

System Support: Android and IOS

The controller is compatible with most of remote chips with 433MHz fix code, dip code or learning code.

Compatible: 2260, 2262, 2264, 1527, FP527, 2240, SMC918 ETC.

Not Compatible: all types of rolling code remotes like HCS302, HCS101 etc.

ORSEAR



MODEL: OSC200



TUYA WIFI CAMERA

FUNCTIONS AND ADVANTAGES

1. Open and close automatic gate by smart phone through WIFI and the Internet and bluetooth.
2. One camera can control maximum 4 operators.
3. Supports WIFI connection or network cable connection.
4. Supports Android and IOS smart phone system.
5. Supports Amazon Alexa, Google Assistance
6. Regular Packing Components: camera x 1, adaptor x 1, manual x 1, installation accessories.

MODEL: OSC01

Code: Copy Code

RF Transmit Range: 30-50 meter

Total Power Consumption: 5W(Max)

Power Supply: AC100-240V

Local Storage: MicroTF card

Video Compression: H.264 High Profile

Connection: WIFI/Bluetooth

RF Frequency: 433.92MHz

Wireless Standard: 2.4G 802.11 b/g/n

App Support: Tuya and SmartLife

System Support: Android and IOS


Pixel: 1.0Mp/2.0MP

Wireless Encryption: WEP/WPA/WPA2 Encryption

The controller is compatible with most of remote chips with 433MHz fix code, dip code or learning code.


Compatible: 2260, 2262, 2264, 1527, FP527, 2240, SMC918 ETC.

Not Compatible: all types of rolling code remotes like HCS302, HCS101 etc.

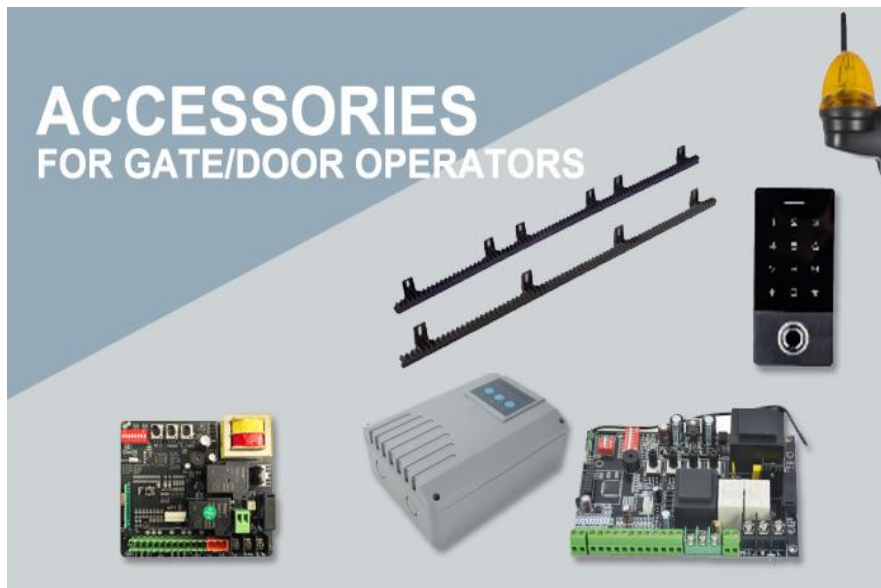

ACCESSORIES

- 1 Control Board
- 2 Warning Light
- 3 Photocell
- 4 Gear Rack
- 5 Remote Transmitters



Product: AC Sliding Gate Operator Control Board

MODEL: OS628

Power Input: AC230V

Size: 130 x 107 mm

Remote: learning code


Frequency: 433.92MHz

WIFI Chip: available

Work with ACS01, AC300, AC600, AC800

Interfaces: Infrared sensor, loop, wall switch (open, stop, close), warning light, wifi chip.

Functions: Auto close, resistance rebound, slow start and slow stop, max start, remote lock/pedestrian mode etc.



Product: AC Sliding Gate Operator Control Board

MODEL: OS718

Power Input: AC230V

Size: 130 x 107 mm

Remote: learning code


Frequency: 433.92MHz

WIFI Chip: available

Work with ACS01, AC300-AC2000, ACSL200

Interfaces: Infrared sensor, loop, wall switch (open, stop, close), warning light, wifi chip.

Functions: Auto close, resistance rebound, slow start and slow stop, max start, remote lock/pedestrian mode etc.



Product: AC Sliding Gate Operator Control Board

MODEL: MM-AC377

Power Input: AC230V

Size: 130 x 107 mm


Remote: learning code

Frequency: 433.92MHz


Work with ACS01, AC300-AC2000, ACSL200

Interfaces: Infrared sensor, loop, wall switch (open, stop, close), warning light.


Functions: Auto close, resistance rebound, slow start and slow stop, remote lock/pedestrian mode etc.



Product: AC Sliding Gate Operator Control Board
 MODEL: LS01 Power Input: AC230V
 Size: 148 x 100 mm Remote: learning code
 Frequency: 433.92MHz
 Work with ACS01, AC300-AC2000, ACSL200
 Interfaces: Infrared sensor, loop, wall switch (open, stop, close), warning light, master-slave.
 Functions: Master-slave mode, auto close, resistance rebound, slow start and slow stop, remote lock/pedestrian mode etc.



Product: DC Sliding Gate Operator Control Board
 MODEL: BH900-E Power Input: DC24V
 Size: 132 x 100 mm Remote: learning code
 Frequency: 433.92MHz
 Work with BG900 and BG900-15M
 Interfaces: Infrared sensor, loop, wall switch (open, stop, close), warning light, DC24V battery.
 Functions: Master-slave mode, auto close, resistance rebound, slow start and slow stop, remote lock/pedestrian mode etc.



Product: DC Sliding Gate Operator Control Board
 MODEL: MM-DC24V-E Power Input: DC24V
 Size: 149 x 102 mm Remote: learning code
 Frequency: 433.92MHz
 Work with BG1000
 Interfaces: Infrared sensor, loop, wall switch (open, stop, close), warning light, DC24V battery, solar panel.
 Functions: Master-slave mode, auto close, resistance rebound, slow start and slow stop, remote lock/pedestrian mode etc.



Product: DC Sliding Gate Operator Control Board
 MODEL: MM-DC24V-3T Power Input: DC24V
 Size: 187 x 102 mm Remote: learning code
 Frequency: 433.92MHz
 Work with BG1500, BG2000, BG2500
 Interfaces: Infrared sensor, loop, wall switch (open, stop, close), warning light, DC24V battery.
 Functions: Master-slave mode, auto close, resistance rebound, slow start and slow stop, remote lock/pedestrian mode etc.



Product: DC Arm Swing Gate Operator Control Box
 MODEL: AU39LB Power Input: DC24V
 Size: 240 x 185 x 95 mm Remote: learning code
 Frequency: 433.92MHz WIFI Chip: available
 Work with ASM12/ASM13
 Interfaces: Infrared sensor, loop, wall switch (open, stop, close), warning light, DC24V battery, electric lock, solar panel.
 Functions: Auto close, resistance rebound, slow start and slow stop, remote lock etc.



Product: DC Arm Swing Gate Operator Control Box
 MODEL: F330VS Power Input: DC24V
 Size: 265 x 205 x 105 mm Remote: learning code
 Frequency: 433.92MHz WIFI Chip: available
 Work with AS230K and AS330K
 Interfaces: Infrared sensor, loop, wall switch (open, stop, close), warning light, DC24V battery, electric lock.
 Functions: Auto close, resistance rebound, slow start and slow stop, remote lock etc.

ORSEANAR



Product: DC Wheel Swing Gate Operator Control Box
 MODEL: OSW108 Power Input: DC24V
 Size: 240 x 180 x 85 mm Remote: learning code
 Frequency: 433.92MHz WIFI Chip: available
 Work with RSM03
 Interfaces: Infrared sensor, loop, wall switch (open, stop, close), warning light, DC24V battery, electric lock.
 Functions: Auto close, resistance rebound, slow start and slow stop, remote lock etc.



Product: Warning Light
 Model: WL13
 Power Input:
 AC220V/110V/DC24V
 Size: 165 x 95 x 95mm



Product: Warning Light
 Model: WL431
 Power Input:
 AC/DC12~256V
 Lamp Type: LED
 Size: 180 x 125 x 100mm



Product: Warning Light
 Model: WL319
 Power Input:
 AC/DC12~256V
 Lamp Type: LED
 Size: 73 x 67 x 56mm



Product: Warning Light
 Model: WL319
 Power Input:
 AC/DC12~256V
 Lamp Type: LED
 Size: 100 x 76 x 62mm



Product: Photocell
 Model: PH15
 Inductive Distance: Max 15m
 Power Input: AC/DC 12/24V
 Relay Output: NO/NC
 Waterproof: IP55
 Size: 77 x 49 x 28mm



Product: Photocell
 Model: PH25
 Inductive Distance: Max 25m
 Power Input: AC/DC 12/24V
 Relay Output: NO/NC
 Waterproof: IP55
 Size: 85 x 55 x 29mm

ORSEANAR



Product:
 Anti-Interference Photocell
 Model: PHAI-15A
 Inductive Distance: Max 15m
 Power Input: AC/DC 12/24V
 Relay Output: NO/NC
 Waterproof: IP55
 Size: 74 x 45 x 24mm




Product:
 Anti-Interference Photocell
 Model: PHAI-15B
 Inductive Distance: Max 15m
 Power Input: AC/DC 12/24V
 Relay Output: NO/NC
 Waterproof: IP55
 Size: 73 x 37 x 26mm



Product: Waterproof Key Pad
 Model: K86
 Power Input: DC 12V $\pm$ 10%
 User Capacity: 5000 users
 Card Type: MF1 card or EM card
 Size: 85 x 86 x 21mm



Product: Wireless Wall Switch
 Model: K3
 Battery: 23A 12V
 Frequency: 433.92/315MHz
 Coding: Copy Code
 Size: 86 x 86 x 14mm



Product: Metal Access Keypad
 Power Input: DC12V
 Door Open Method:
 Fingerprint, Card, Password,
 Other Combinations
 Capacity: 300 finger prints
 Size: 139 x 70 x 20mm



Product: Push Button
 Output: com, NO/NC
 Size: 86.5 x 86.5 x 24mm



Product: Solar Panel
 Rated Power: 20W
 Open Circuit Voltage: 43.2V
 Voltage at Pmpp: 38V
 Module Efficiency: 20%
 Size: 470 x 350 x 20mm



Product: Backup Battery
 Capacity: 5AH
 Output Voltage: DC 24V
 Size: 250 x 170 x 90mm

ORSEANAR



Product: Nylon Gear Rack
 4 holes: 19.7mm x 26mm x 1050mm with 4 bolts and nuts
 6 holes: 20mm x 26.5mm x 1080mm (with 6 bolts and nuts)
 Nylon with steel enforced, A3 steel, mould 4



Product: Steel Rack
 A: 8mm x 30mm x 1005mm
 B: 10mm x 30mm x 1005mm
 C: 12mm x 30mm x 1005mm
 A3 steel, with 3 bolts and nuts, mould 4



OSY50X

Learning Code

Battery: 23A/12V

Frequency: 433/315MHz



OSY60X

Learning Code

Battery: 3V/2032A

Frequency: 433/315MHz



OSY70X

Learning Code

Battery: 23A/12V

Frequency: 433/315MHz



OSY100X

Long Range Learning Code

Battery: 23A/12V

Frequency: 433/315MHz



OSY60C

Copy code

Battery: 3V/2032A

Frequency: 433/315MHz



OSY10C

Copy code

Battery: 3V/2032A

Frequency: 433/315MHz



OSY20C

Copy code

Battery: 3V/2032A

Frequency: 433/315MHz



OSY30C

Copy code

Battery: 23A/12V

Frequency: 433/315MHz



OSY-10

Copy code

Battery: 3V/2032A

Frequency: 433MHz

ORSEANAR



OSY40C

Copy code

Battery: 3V/2032A

Frequency: 433/315MHz



OSY50C

Copy code

Battery: 23A/12V

Frequency: 433/315MHz



OSY70C

Copy code

Battery: 23A/12V

Frequency: 433/315MHz



OSY100C

Long Range Copy code

Battery: 23A/12V

Frequency: 433/315MHz



OSY80C

Copy code

Battery: 3V/2032A

Frequency: 433/315MHz



OSY90C

Copy code

Battery: 3V/2032A

Frequency: 433/315MHz



OSY15C

Copy code

Battery: 27A/12V

Frequency: 433/315MHz



OSY25C

Copy code

Battery: 3V/2032A

Frequency: 433/315MHz