

WI-FI SMART GATE OPENER CONTROLLER

USER MANUAL



Smart Life app



Tuya app

1. Production Introduction

Packing list: Controller x 1, USB Power Adapter x 1, Type C wire x 1, Screw Accessories Package x 1, Sticker x 1.




Controller



USB Power Adapter



Type C wire



Screws



Sticker



Manual

2. Parameters

Product Name: WIFI/Bluetooth Controller

Connection: WIFI/Bluetooth

Code: Copy code

RF Frequency: 433MHz

RF transmit range: 30-50 meters

Working temperature: -40° C ~ +60° C

Power Supply: 100-240V

Power Consumption: Lower than 1W

Size: 90x90x20.4mm

App support: Tuya or Smart Life

Smartphone Support: Android and IOS

3. APP Installation


3.1 App: Tuya or Smart Life

Download app: Scan the QR code below to download and install.

Android users can download the app through Google Play, IOS users can download the app through App Store.




3.2 Register and login: open the app to register and login according to the prompts.

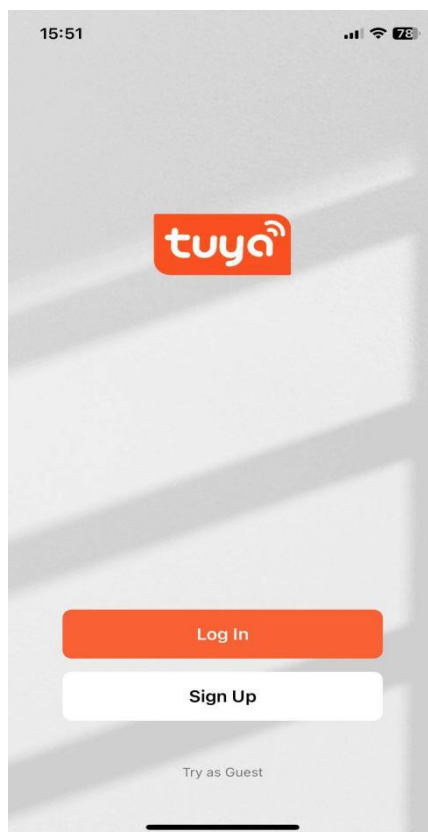


4. Add the Device.

4.1 Make sure WIFI is available and connected to the Internet.

4.2 Turn on the WIFI and Bluetooth function on your smart phone.

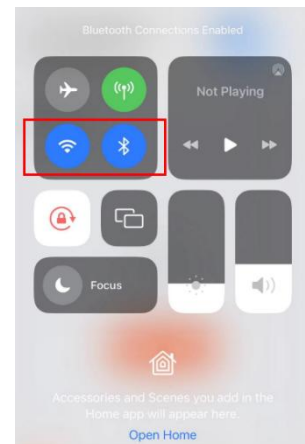


4.3 Open the Tuya app then press “+” in the upper right corner of the main screen.

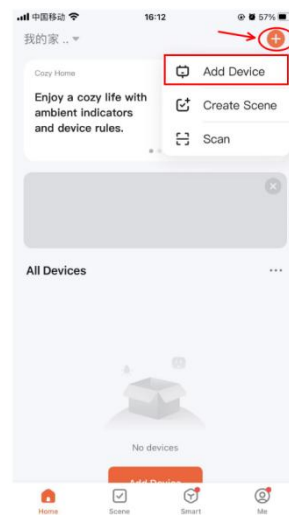


4.4 You will see a circular controller icon appear in the app. Click it to add the controller. If the app does not display the controller icon, press and hold the circular button on the left side of the controller for 5 seconds to reset the controller.



4.5 Select your local WIFI name and WIFI password then press “Next”.

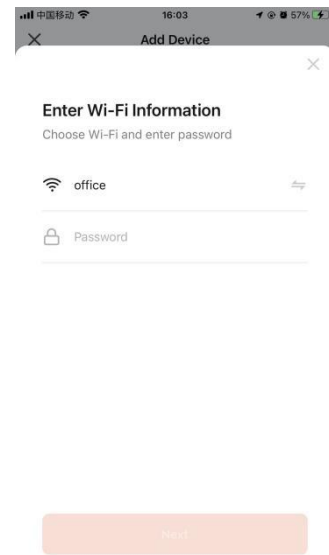

4.6 You can press “” to modify the controller name then press “DONE” to complete the setting.

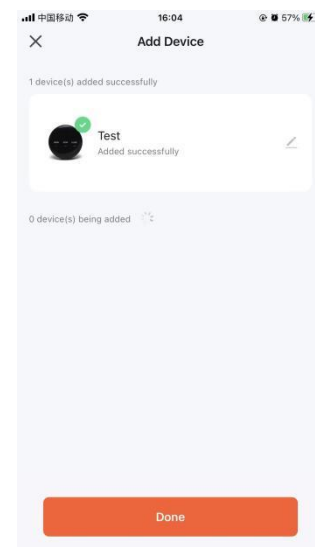

5. Pair the controller with remote.

The controller is compatible with most of remote chips with 433MHz fix code, dip code or learning code.

Compatible: 2260, 2262, 2264, 1527, FP527, 2240, SMC918 ETC.

Not Compatible: all types of rolling code remotes like HCS302, HCS101 etc.

Setting: Place the remote control and controller together, and press and hold the corresponding keys of the controller and remote control to copy. For example, press and hold the OPEN button of the controller and remote control at the same time. Wait until the red light changes from flashing to solid. Similarly, the CLOSE button and STOP button are also configured in this way. After configuration, try to see if the OPEN, CLOSE, and STOP buttons on the controller can control the machine.

Clear the controller codes:

Press and hold the STOP and CLOSE buttons at the same time until the red light flashes quickly to prove that the code is cleared successfully

6. Matters Need Attention

Try to keep away from the metal space;

Avoid the furniture, microwave oven blocked;

Avoid the space where the audio, video and data lines are wound, and keep the space away from them as large as possible;

Ensure that as close as possible to the coverage of wireless Wi-Fi signals.